



YAMAHA DT250 MX




Revolution In The Double World Of The DT250

Yamaha have transformed the whole concept of the on/off road machine at a stroke. The revolutionary new Monoshock cantilever frame has been fitted with DT250 engine and 5-speed gearbox. On this winning combination a new styled tank, seat and rear mudguard unit have been fitted, rubber mounted direction indicators to absorb any shock, an unbreakable plastic front mudguard following moto-cross pattern and a luxurious seat to take

the sting out of cross-country riding.

With superb brakes and lights, the new DT250 is set to grab its place at the head of the action at sporting occasions or even when being used simply as a ride to work commuter bike.

The Monoshock frame is the latest thinking in motorcycle suspension and the DT250 has it first!

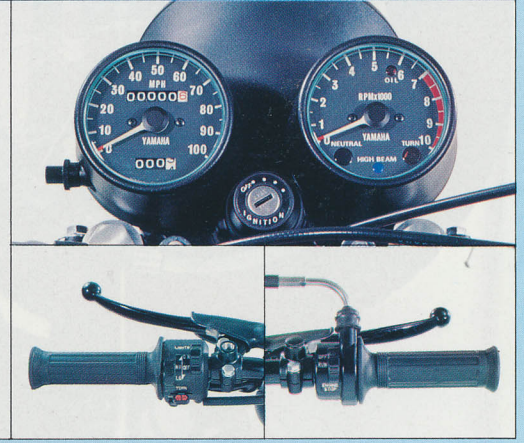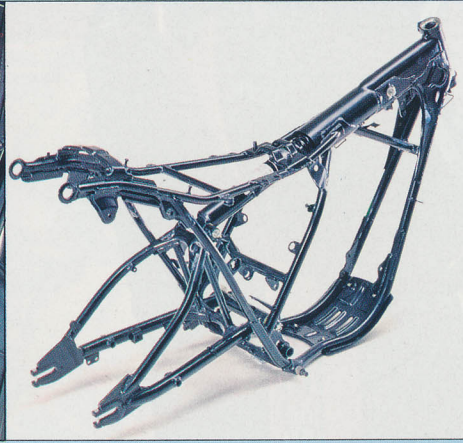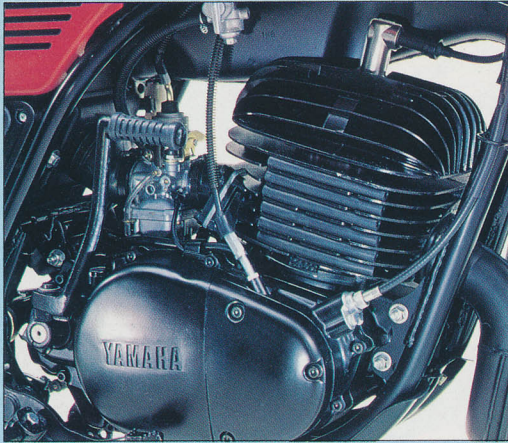

Engine

A single cylinder 246-cc engine producing 23 hp at 6,000 r.p.m. provides the widest possible spread of torque required for all off-road use. Reed valve torque induction, extensive use of light alloys and Yamaha's patented Autolube injection system guarantee efficiency and long life.

The exhaust pipe and silencer are well tucked away under the new seat unit to maintain the machine's slender profile. Air cleaner vents are high to allow the machine to take to deep stream beds when engaged on cross country journies.

V-type Reed Valve

Employing a special stainless-steel reed-valve assembly between the carburetor and the engine, intake is positive and efficient. Operating due to pressure variations within the engine itself, the reed valves open and close on demand positively fueling the engine and preventing blow-back through the carburetor, resulting in increased torque and higher economy.

Gearbox

Driven by helical cut gears from the crankshaft the 5-speed gearbox has been designed for speedy and slick gear changing. The light powerful clutch can take every atom of punishment the toughest going can provide.

Running in oil, the special competition gearbox is part of the successful appeal of the DT250.

Frame

Drawn from high tensile steel, the famous Yamaha double cradle frame is the basis of the DT250's taut and responsive handling. A lifetime of brutal off-road punishment can be absorbed by this strongly welded component which is giving satisfaction and

enjoyment on many thousands of DT250 models around the world.

Suspension

It is fabulous news for every enthusiast that Yamaha are now fitting their Monoshock Suspension System de Carbon to the DT250. Controlled by a single heavyweight spring unit utilizing gas and oil, the suspension is both progressive and firm and allows the back wheel to follow the contours of the ground so keeping the power flow constant and smooth.

The front forks follow Yamaha's sporting tradition by being smooth, capable of absorbing every shock and containing the most up-to-date damping mechanism known to the world of motorcycling.

Brakes

Yamaha's unique labyrinth sealed brakes are not affected by water or dust. On a bike used on rugged territory and which may also be used in traffic, this design prevents grabbing and maintains emergency stop capabilities.

Lighting

For safe riding day or night, the lighting equipment is designed to be readily visible by other traffic and so that the rider's field of vision is as wide as possible at night. The turn signals and rear stop light brightly indicating the rider's intentions, and the instrumentation is softly backlit for clear nighttime viewing.

Speedometer and Tachometer

The overall operation and speed of the bike can be easily monitored at a glance at the large, easily-readable tachometer and speedometer. These precision instruments are shock mounted for lasting durability and are placed at an optimum location for quick viewing.

SPECIFICATIONS

ENGINE

Type2-stroke, Torque Induction, Single Displacement,246 cc
Bore & Stroke70×64 mm
Compression ratio6.7 : 1
Max. horsepower23 bhp @ 6,000 rpm
Max. torque2.8 kg-m @ 5,500 rpm
Max. speed range119 km/h
Lubrication systemAutolube
Starting systemPrimary kick starter
Primary transmissionGear
Final transmissionChain
Gearbox5-speed
CarburettorVM28SS (×1)
ClutchMulti plate, wet
Battery6 V, 6 AH
Ignition typeMagneto, CB/Coil

DIMENSIONS

Overall length2,160 mm
Overall width870 mm
Overall height1,165 mm
Seat height855 mm
Wheelbase1,420 mm
Weight (net)118.5 kg
Fuel tank capacity9 lit.
Oil tank capacity1.1 lit.
Tires front3.00-21-4PR
rear4.00-18-4PR
Brakes frontDrum
rearDrum

* Specifications subject to change without notice.

YAMAHA, It's a way of life



YAMAHA MOTOR N. V.

Postbus 7829 PROF. E. M. Meyerslaan 3
Amstelveen (Amsterdam), Holland

SINCE 1887 LIT-3MC-0107021-77/51.10×50 Printed in Japan