
BULLET





NHE!

BULLET-STD-BLACK

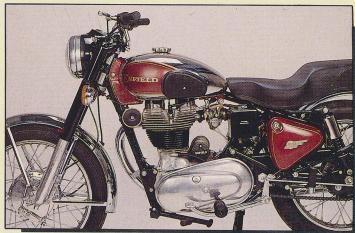

BULLET-DLX-BURGUNDY RED



BULLET-STD-ATHENA GREY

* TECHNICAL SPECIFICATION

	350 сс	500 cc
ENGINE	Four Stroke, OHV	Four Stroke, OHV
BORE & STROKE	70mm x 90mm	84mm x 90mm
CUBIC CAPACITY	346cc	499cc
COMPRESSION RATIO	7.25:1	6.5:1
ENGINE OUTPUT/TORQUE	18 BHP @ 5626 RPM 2.74 kgm/2875 RPM	22 BHP @ 5400 RPM 3.5 kgm/3000 RPM
ELECTRICAL	12 Volts	12 Volts
IGNITION	Battery & Coil	Battery & Coil
LUBRICATION	Dry Sump Positive Plunger Type	Dry Sump Positive Plunger Type
TRANSMISSION	4 Speed - 1 Up & 3 Down	4 Speed - 1 Up & 3 Down
CLUTCH	Multiplate - Oil immersed	Multiplate - Oil immersed
SUSPENSION	Front : Telescopic - Hydraulic Rear : Twin Shock Absorbers	Telescopic - Hydraulic Twin Shock Absorbers
BRAKES	Front : Twin Lead - Drum 7" Rear : Drum 6"	Twin Lead - Drum 7" Drum 6"
TYRES	Front - 3.25x19 Rear - 3.50x19	3.25x19 3.50x19
TANK CAPACITY/RESERVE FUEL CONSUMPTION	14.5 Ltrs./1.25 Ltrs. • 75 MPg (approx.)	14.5 Ltrs/1.25 Ltrs. • 70 MPg (approx.)
DIMENSION LXWXH WHEEL BASE GROUND CLEARANCE SADDLE HEIGHT	2110x700x1067mm 1372mm 140mm 760mm/30"	2110x700x1067mm 1372mm 140mm 760mm/30"
MAXIMUM SPEED	110 KMPH	125 KMPH
DRY WEIGHT	163 kgs	168 kgs

- * "All Enfield Bullets exported by Enfield directly from its Madras factory, comply with Applicable Safety Standards. The manufacturer reserves the right to change, without notice, equipment, specifications, colours, material and other items to apply to local conditions."
- Under normal riding condition.

IMPORTER

