

# Kawasaki KM90





## A midi-bike that thinks it's a grown up bike.

Let's face it, the KM90 is not a full size motorcycle. It was made for junior-size riders. Young teenagers. Or people who are naturally smaller. It fits them so they can ride safely and without feeling they're holding on to more than they can handle. When seated on the comfortably padded seat they can touch the ground with their feet. It fits.




### Get-up-and-go, street legal

The KM90 may be small but it's all motorcycle. The rotary disc valve engine has a lot of "GO" in it. It fits neatly in the midi-size frame.

Out on the road, if you have a licence, you can take it anywhere. It's legal. It has a handsome speedometer and full lighting system.

What's new this year? A new gear shift pattern. Kawasaki has standardized on the 1-N-2-3-4-5 pattern. It's safe if you're going to change from one machine to another because there's no need to learn new shifts. Gear changes are clean and crisp with neutral easy to find.

If you're the right size for the Kawasaki KM90 you've got a good ride. Now there's nothing to stop you keeping up with the big guys! Go get 'em, Tiger!

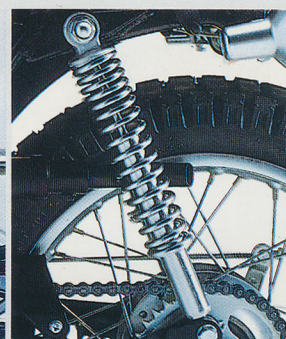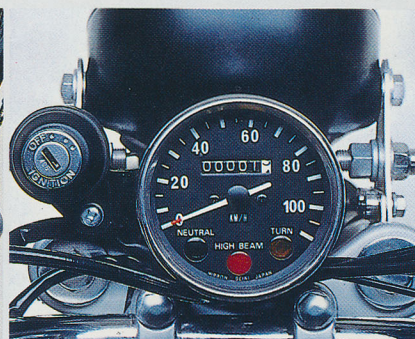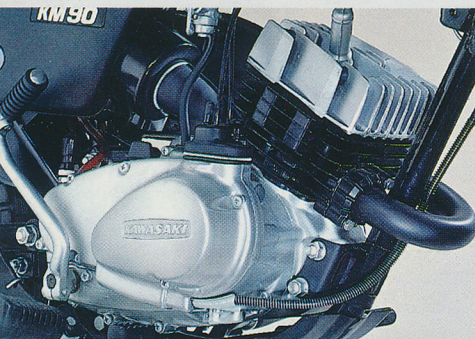

Colours available: Candy Lime Green, Poppy Red



### KM90-A6 SPECIFICATIONS

ENGINE		Shift pattern		DIMENSIONS	
Type	2-stroke, single cylinder, rotary disc valve.	Clutch	1-N-2-3-4-5	Length, overall	1,745 mm (68.7 in.)
Displacement	89 cc (5.43 cu. in.)		Wet, multi-disc	Width, overall	765 mm (30.1 in.)
Bore and stroke	47.0 x 51.8 mm (1.85 x 2.04 in.)	<b>FRAME</b>		Height, overall	945 mm (37.2 in.)
Compression ratio	6.8: 1	Type	Tubular, single cradle	Wheelbase	1,100 mm (43.3 in.)
Ignition system	Magneto	Suspension: Front	Telescopic fork	Ground clearance	160 mm (6.3 in.)
Starting system	Primary kick	Rear	Swing arm	Dry weight	76 kg (168 lbs.)
Lubrication	Superlube (oil injection)	Tyre size: Front	2.50 - 16 4PR	Fuel tank capacity	6.0 litres (1.3 Imp. gal.)
		Rear	3.00 - 14 4PR	Oil tank capacity	1.0 litre (0.9 Imp. qt.)
<b>TRANSMISSION</b>		<b>BRAKES</b>		The specifications mentioned here apply to and have been achieved by production models under standard operating conditions. We intend only to give a fair description of the motorcycles and their performance capabilities but these specifications may not apply to every machine supplied for sale. Kawasaki Heavy Industries, Ltd. reserves the right to alter specifications without prior notice.	
Type	5-speed, constant mesh, return shift	Front	110 x 30 mm (4.33 x 1.18 in.)		
		Rear	110 x 30 mm (4.33 x 1.18 in.)		

**CRADLEY HEATH  
KAWASAKI CENTRE,  
ST. ANNES ROAD,  
CRADLEY HEATH,  
WEST MIDLANDS,  
Tel. No: CRADLEY HEATH 69366**

