

KM90

 Kawasaki








It's a midi bike. Goes like a big bike!

Kawasaki insists that you don't have to be big to be strong. Or brave. Or a skilful rider. The KM90 is built for junior-size riders and it can help make you experts with experience. Because everything you'll find on a big bike you'll find on this midi-bike. It's easy to handle and fun to ride. The rotary disc valve engine puts out 6.6 horses at 6,500 rpm. That's plenty of GO. It's fitted into a midi-size frame that can take a lot of punishment when you take the bike into the country and start to leap around like a motocrosser. And the telescopic forks and shock absorbers help smooth things out for you.

Full lighting, street legal.

If you're old enough to hold a license you can ride this bike on the street. It's fully equipped. There's a complete lighting system including turn signals, and big, bold speedometer with built-in odometer to tell you how far you've gone. The seat is slim, sporty and well cushioned. But the most fun is riding in the country where you can turn on the power and snick up through the 5-speed gearbox. Test your skill rounding corners by selecting the right gear and a light touch of the brakes. It's wonderful how quickly you'll get the hang of it. And when you're ready to move up to a bigger bike... Kawasaki's got one waiting for you.

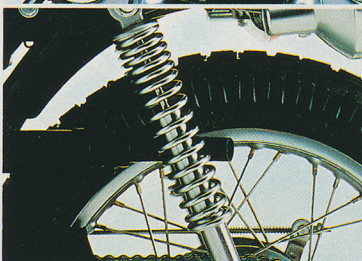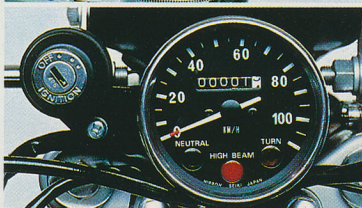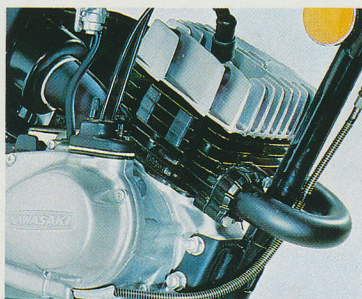

Colours available: Poppy Red,
Sunlight Yellow.



KM90-A5 SPECIFICATIONS

PERFORMANCE

Maximum horsepower	6.6 hp/6,500 rpm
Maximum torque	0.81 kg-m/5,500 rpm (5.9 ft-lb/5,500 rpm)
Acceleration	SS 200 m (1/8 mile): 12.3 sec.
Minimum turning radius	1.6 m (63.0 in.)
Braking distance	6.5 m @ 35 kph (21.3 ft @ 22 mph)

ENGINE

Type	2-stroke, single cylinder, rotary disc valve.
Displacement	89 cc (5.43 cu. in.)
Bore and stroke	47.0 x 51.8 mm (1.85 x 2.04 in.)
Compression ratio	6.8 : 1
Ignition system	Magneto
Starting system	Primary kick
Lubrication	Superlube (oil injection)

TRANSMISSION

Type	5-speed, constant mesh, return shift
Shift pattern	N-1-2-3-4-5
Clutch	Wet, multi-disc

FRAME

Type	Tubular, single cradle
Suspension: Front	Telescopic fork
Rear	Swing arm
Tyre size: Front	2.50—16 4PR
Rear	3.00—14 4PR

DIMENSIONS

Length, overall	1,730 mm (68.1 in.)
Width, overall	765 mm (30.1 in.)
Height, overall	945 mm (37.2 in.)
Wheelbase	1,100 mm (43.3 in.)
Ground clearance	160 mm (6.3 in.)
Dry weight	76 kg (168 lbs.)
Fuel tank capacity	6.0 litres (1.3 Imp. gal.)
Oil tank capacity	1.0 litre (0.9 Imp. qt.)

The specifications mentioned here apply to and have been achieved by production models under standard operating conditions. We intend only to give a fair description of the motorcycles and their performance capabilities but these specifications may not apply to every machine supplied for sale. Kawasaki Heavy Industries, Ltd. reserves the right to alter specifications without prior notice.



WIDE BAY KAWASAKI

KAWASAKI
HEAVY INDUSTRIES, LTD.
ENGINE AND MOTORCYCLE GROUP

Use your head. Wear a helmet. Enjoy safe riding.

99980-008-11 Printed in Japan